


sewerclean365+

PU-sewer cleaning hose

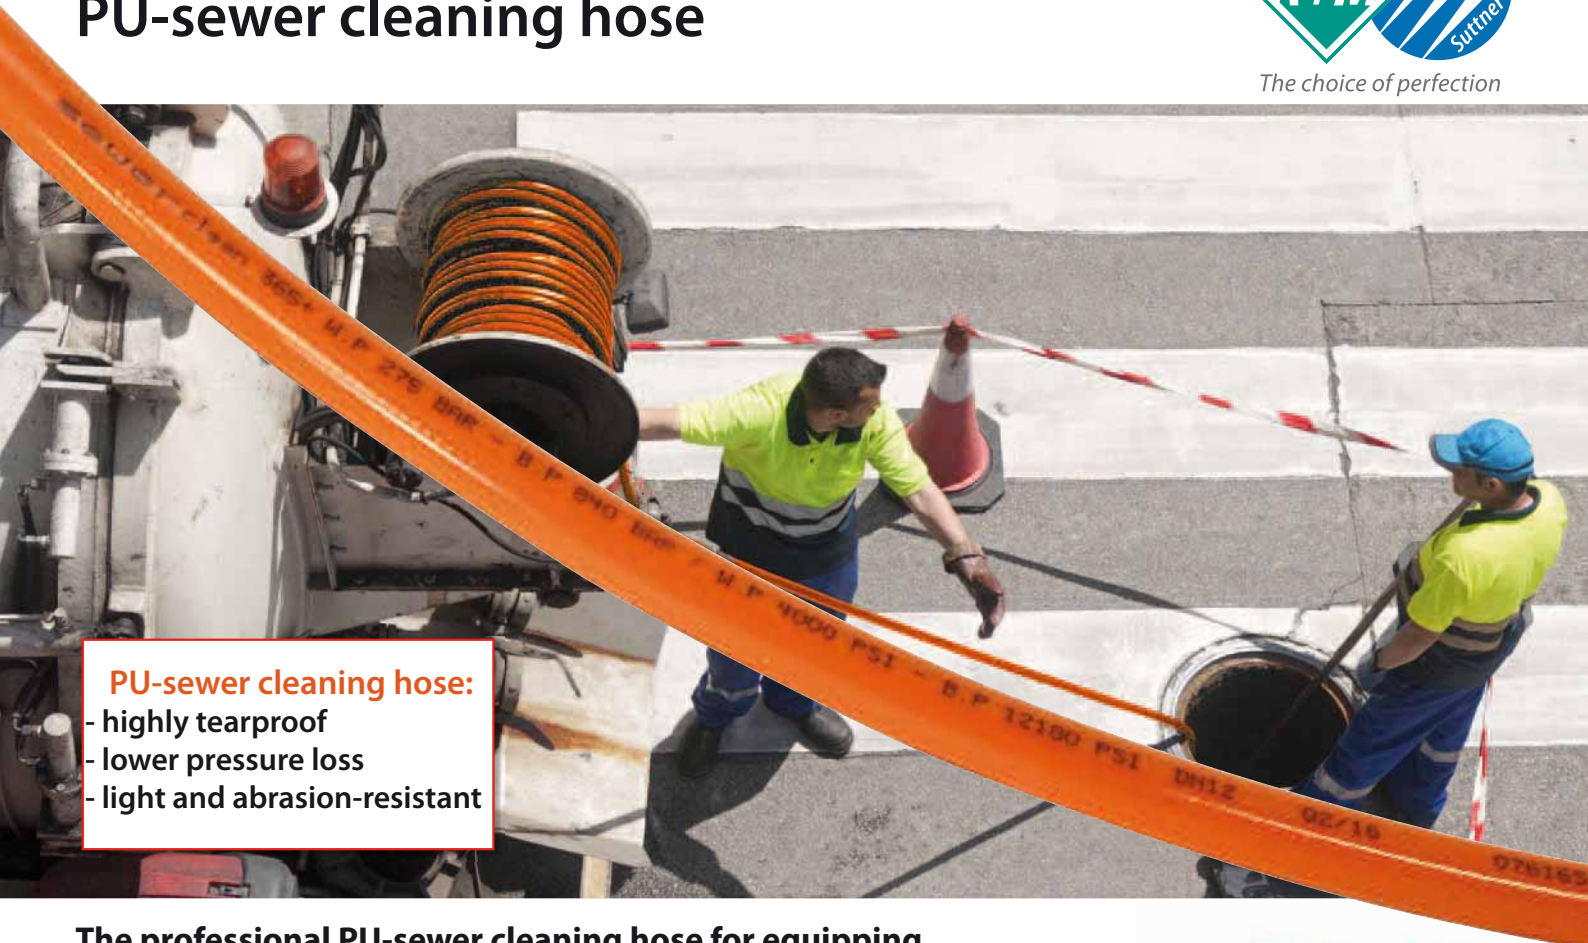


PU-sewer cleaning hose:

- highly tearproof
- lower pressure loss
- light and abrasion-resistant

The professional PU-sewer cleaning hose for equipping sewer cleaning vehicles

- cut- and abrasion-resistant
- extremely long operating life
- highly tearproof by two-fold braid of aramid fibres and polyurethane surface
- good swimming features
- ageing resistant and weather-resistant surface
- -40 °C - +60 °C, -40 °F - +140 °F

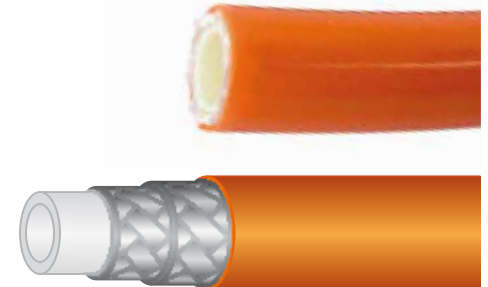


Construction: Two-fold braid of highly tearproof aramid fibres and a surface of abrasion-resistant polyurethane

Technical data

DN	size	⊙		⊘	P		BP		⤿		⊞	°C
		inch	mm	mm	bar	psi	bar	psi	mm	inch	kg/m	
12	-08	1/2	12.7	23.4	275	4000	840	12000	75	3.0	0.24	-40 °C - +60 °C

DKR : M

1/2" : 1/2"



Test certificate:
All hoses are supplied together with a test certificate according to EN 10204.3.1.1.

PU-hose with 2 aramid fibre braids and smooth cover

type	length	R+M Nr.
sewerclean365+	40 m	432 457 120 040
	60 m	432 457 120 060
	80 m	432 457 120 080
	100 m	432 457 120 100
	120 m	432 457 120 120

Symbols DN nominal diameter ⊙ internal diameter ⊘ diameter P pressure BP burst pressure ⤿ bending radius ⊞ weight °C temperature

sewerstar365+

Rubber sewer cleaning hoses




The choice of perfection



Professional sewer cleaning hoses:
 - long operating life
 - high flexibility
 - easy handling

The professional rubber sewer cleaning hose in 3 nominal sizes

- highly abrasion-resistant with an extremely long operating life
- high flexibility by especially developed rubber compound
- extremely abrasion-resistant, ageing resistant and weather-resistant surface
- easy handling by low weight
- excellent pressure resistance and tensile strength
- very low bending radius
- wire braid for high stability
- interior and surface are made out of NR/SBR
- -40 °C - +150 °C, -40 °F - +302 °F

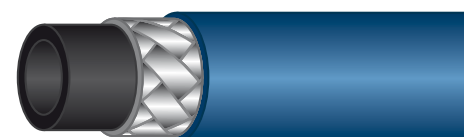

Construction:
 Surface and interior made out of NR/SBR, one wire braid

Technical data

DN	size	⊙		⊙	P		BP		⤿		⊠	°C
		inch	mm		mm	bar	psi	bar	psi	mm		
08	-05	5/16	7.9	15.0	500	7000	1260	18000	115	4.5	0.30	-40 °C - +150 °C
10	-06	3/8	9.8	16.9	280	4000	740	10700	130	5.1	0.34	-40 °C - +150 °C
12	-08	1/2	12.7	22.6	250	3600	640	9280	180	7.1	0.40	-40 °C - +150 °C

Symbols DN nominal diameter ⊙ internal diameter ⊙ diameter P pressure BP burst pressure ⤿ bending radius ⊠ weight °C temperature

sewerstar365+

Rubber sewer cleaning hoses



The choice of perfection

Test certificate:


All hoses are supplied together with a test certificate according to EN 10204.3.1.1.

DKR : M


1/2" : 1/2"



3/8" : 3/8"



3/8" : 1/4"



Rubber hoses with one wire braid and smooth cover

type	nominal diameter	length	R+M Nr.	R+M Nr.	R+M Nr.
sewerstar365+	08	40 m		432 558 080 040	432 556 080 040
	08	80 m		432 558 080 080	432 556 080 080
	10	40 m	432 557 100 040	432 558 100 040	
	10	60 m	432 557 100 060	432 558 100 060	
	10	80 m	432 557 100 080	432 558 100 080	
	10	100 m	432 557 100 100	432 558 100 100	
	10	120 m	432 557 100 120	432 558 100 120	
	12	40 m	432 557 120 040		
	12	60 m	432 557 120 060		
	12	80 m	432 557 120 080		
	12	100 m	432 557 120 100		
	12	120 m	432 557 120 120		