



ZEROMATIC/93 ZEROMATIC/CSC

250 bar

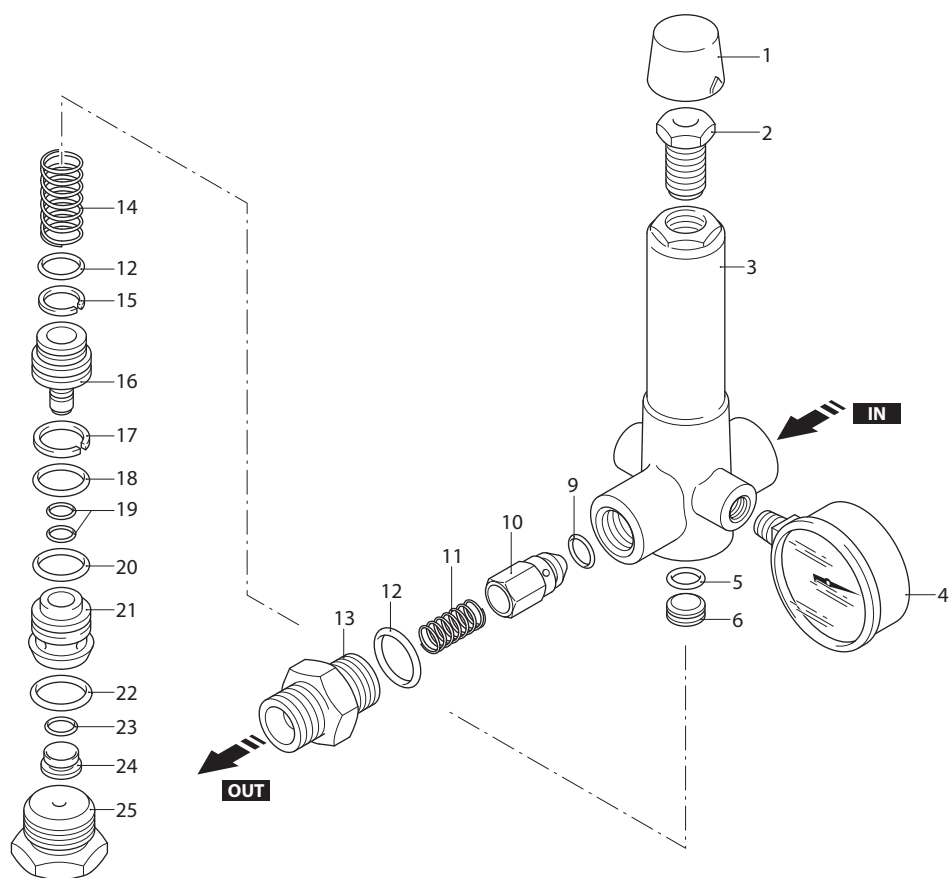

UN000198-GQ

KIT RICAMBI / PART KITS

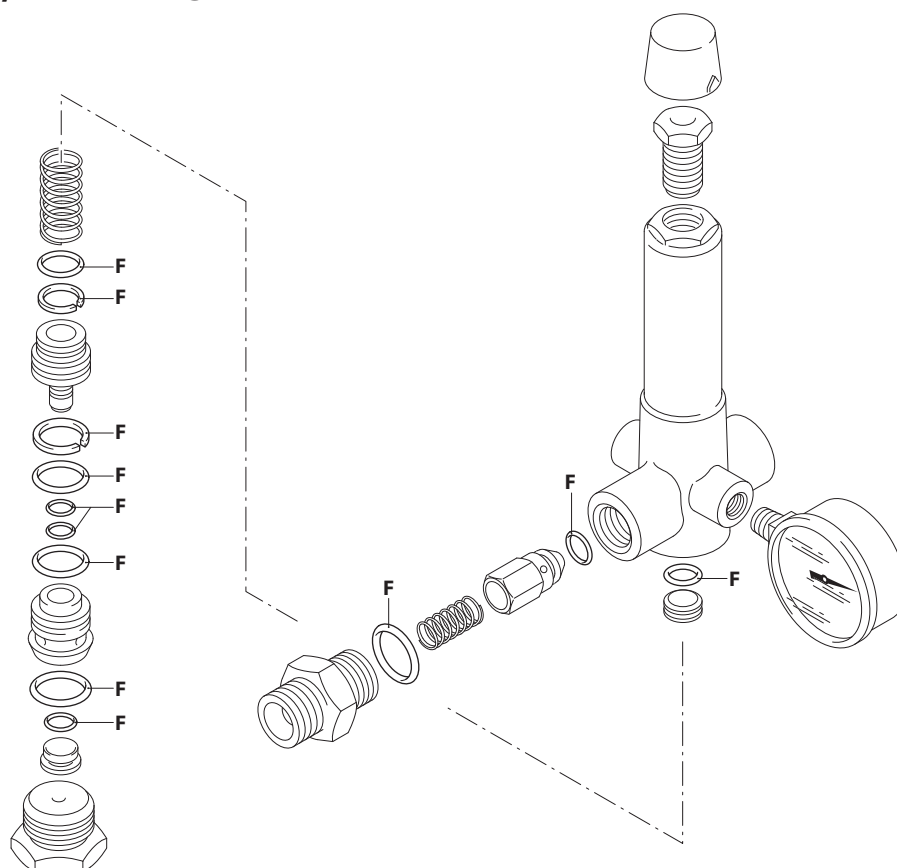

UN000199-CT

ZEROMATIC/93 - ZEROMATIC/CSC

ZEROMATIC/93 (2907)

ZEROMATIC/CSC (22789)

ZEROMATIC/93 (2908)



Pos.	Cod.	Denominazione	Description	Qt	Note	Pos.	Cod.	Denominazione	Description	Qt	Note
1	1020120	Coperchio	Cover	1							
2	1020080	Vite	Screw	1							
3	1560120	Corpo valvola	Valve body	1	● ▲						
	1560200	Corpo valvola	Valve body	1	☆						
4	740260	Manometro	Pressure gauge	1	Optional						
5	770570	Guarnizione OR Ø 18,77x1,78	O-ring	1							
6	1020070	Piattello	Wobble plate	1							
9	1560150	Guarnizione OR Ø 5,94x3,53	O-ring	1	● ☆						
10	1560100	Otturatore	Shutter	1	● ☆						
11	1560140	Molla	Spring	1	● ☆						
12	960160	Guarnizione OR Ø 17,86x2,62	O-ring	2							
13	1560130	Raccordo 3/8" G	Fitting	1	● ▲ ☆						
	1560210	Raccordo 3/8" NPT	Fitting	1	☆						
14	1020110	Molla	Spring	1							
15	1020190	Anello antiestrusione	Ring	1							
16	1020040	Pistone	Piston	1							
17	1020200	Guarnizione OR Ø 20,63x2,62	O-ring	1							
18	390060	Guarnizione OR Ø 20,63x2,62	O-ring	1							
19	600180	Guarnizione OR Ø 7,66x1,78	O-ring	2							
20	770260	Guarnizione OR Ø 23,52x1,78	O-ring	1							
21	1020031	Centraggio	Ring	1							
22	550350	Guarnizione OR Ø 23,81x2,62	O-ring	1							
23	880840	Guarnizione OR Ø 9,25x1,78	O-ring	1							
24	1020061	Sede	Seat	1							
25	1020020	Tappo	Plug	1	● ▲ C=50Nm						
	1020290	Tappo	Plug	1	☆ C=50Nm						

KIT RICAMBI - PART KITS

F=KIT 1830 OR O-rings							
Pos.	Q.ty	Pos.	Q.ty	Pos.	Q.ty	Pos.	Q.ty
5	1	20	1				
9	1	22	1				
12	2	23	1				
15	1						
17	1						
18	1						
19	1						

Pos.	Q.ty	Pos.	Q.ty	Pos.	Q.ty	Pos.	Q.ty

SIMBOLOGIA - SYMBOLS

● Per / For
ZEROMATIC/93
cod. 2907
MAX 250 bar, 40 l/min
INLET: 1/2" G (F)
OUTLET: 3/8" G (M)
BY-PASS: 1/2" G (F)

☆ Per / For
ZEROMATIC/93
cod. 2908
MAX 250 bar, 40 l/min
INLET: 1/2" NPT (F)
OUTLET: 3/8" NPT (M)
BY-PASS: 1/2" NPT (F)

▲ Per / For
ZEROMATIC/CSC
cod. 22789
MAX 250 bar, 40 l/min
INLET: 1/2" G (F)
OUTLET: 3/8" G (M)
BY-PASS: 1/2" G (F)

C Tolleranza coppia di serraggio +0÷-10% / Tightening torque tolerance +0÷-10%

⌚ Avvitare con Loxeal 55-14 / Screw with Loxeal 55-14