

Light weight spray guns, “Baby” series

Compact with less water usage



Reference:

BABTN01-B

Aluminium

BMBTN01-B

Brass


BRBTN01-B

Stainless Steel

All **bold** printed items are ex. Stock available



Clear red arrow to show the water beam direction

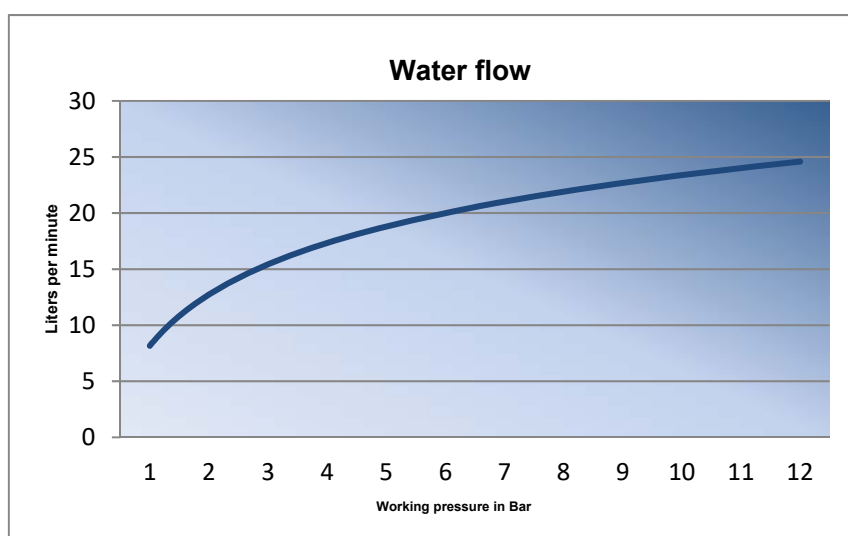

Water flow in l/min with fully squeezed trigger



Water beam controllable from broad beam to strong jet

Technical specifications	BABTN01-B	BMBTN01-B	BRBTN01-B
Body	Aluminium	Brass	St.st. AISI 316
Covers	EPDM	EPDM	EPDM
Seals	EPDM (FDA)	EPDM (FDA)	VITON (FDA)
Trigger and pusher	St.st. AISI 304	St.st. AISI 304	St.st. AISI 304
Connection	½" BSP female	½" BSP female	½" BSP female
Max. temperature	50°C (122°F)	95°C (231°F)	95°C (231°F)
Max. pressure	12 bar (170 PSI)	25 bar (354 PSI)	25 bar (354 PSI)
Weight	360 g	622 g	680 g

Not for use with steam

Although all products are suited for use with higher temperatures, it's strongly recommended to take special precautions when using hot water.

