




The choice of perfection



Everything for the professional foam application in the agricultural industry

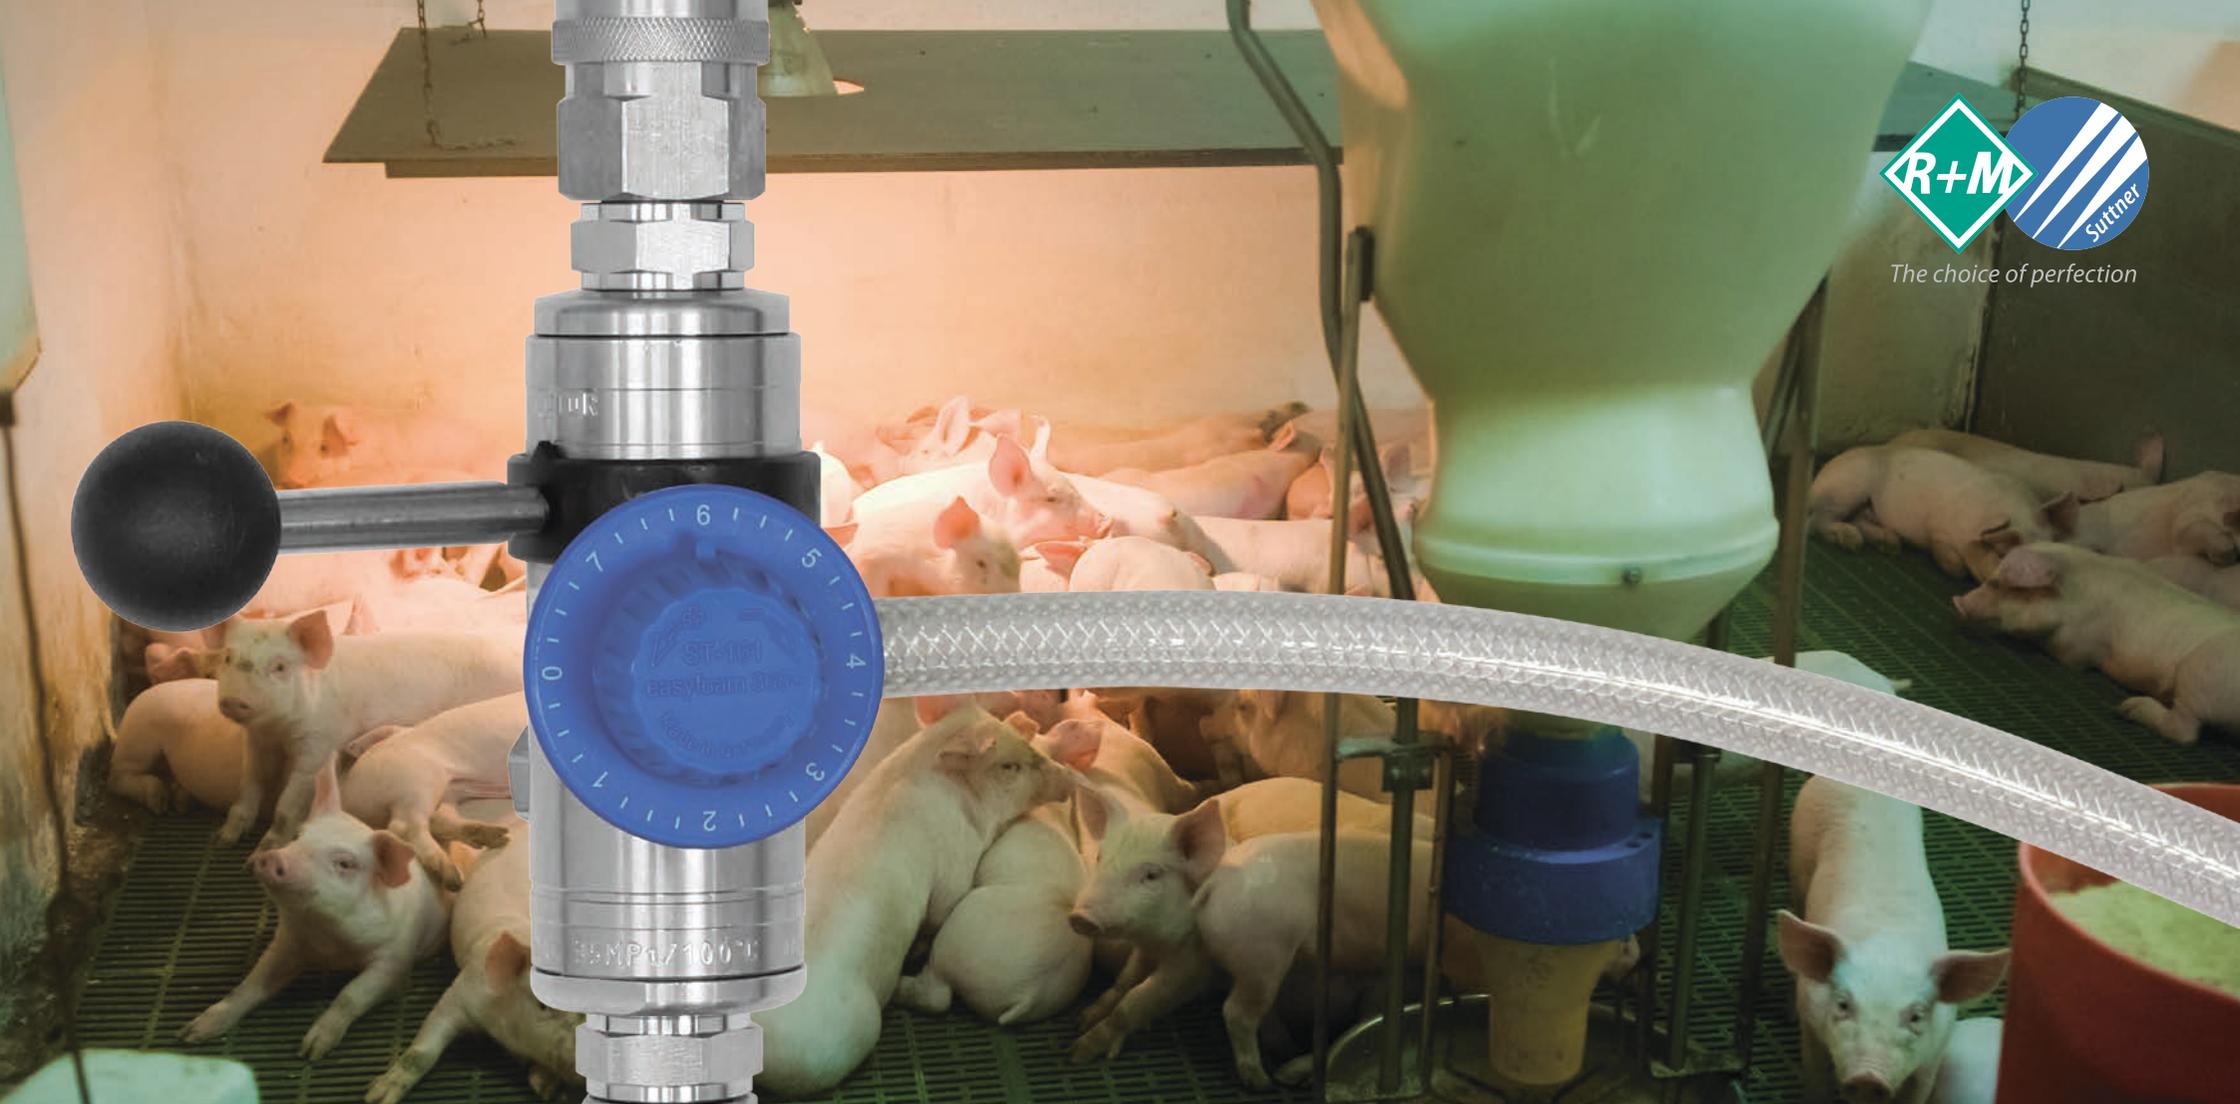

easy foam 365+



easyfoam365+ foam application in the agricultural industry:
 Everything for the professional foam cleaning without compressed air, 120 bar working pressure required.
 Take advantage of our product range, perfectly in tune to each other to achieve the best possible cleaning result.

R+M Nr.
594 20

R+M Nr.
593 20

R+M Nr.
595 20

R+M Nr.
189 211 0

R+M Nr.
576 69
591 201 2

R+M Nr.
598 920 239
598 010 809

R+M Nr.
570 99
557 29

R+M Nr.
200 045 550
570 99

R+M Nr.
591 201 2

R+M Nr.
708 00

R+M Nr.
599 202 0

R+M Nr.
200 167 606

R+M Nr.
570 99
557 29

R+M Nr.
705 121 22

R+M Nr.
200 045 560

R+M Nr.
040 001 255
070 012 009
200 458 811

R+M Nr.
200 031 530

R+M Nr.
200 164 730

R+M Nr.
200 054 630
619 10

R+M Nr.
200 072 651
202 600 545

R+M Nr.
105 000 002

R+M Nr.
354 201 443 15

R+M Nr.
202 600 625

R+M Nr.
350 100 320



The choice of perfection



easyfoam365+

easyfoam365+ foam and disinfectant units ST-164

The efficient **easyfoam365+** foam and disinfection unit is indispensable wherever frequent cleaning and disinfection is required. At the same time, it helps to ensure a high level of hygiene, with maximum flexibility and efficiency. The foam and disinfection unit is used in particular for cleaning livestock or poultry farms and in food processing plants. The mixing unit is a combination of stainless

steel and special high-performance plastics. The shift lever determines the addition of one of two connected chemicals. In its possible configuration, it is suitable for dosing in low pressure from approx. 4 bar up to a maximum of 350 bar. In the flushing position, up to 60 l/min. can pass through the injector unit almost without any loss in pressure.



Trolley with foam and disinfection unit:
made out of stainless steel; manoeuvrable and easy to handle such as a sack truck.
H x W x D
1.150 x 540 x 620 mm

| Flow | R+M Nr. |
|------------|-------------|
| < 21 l/min | 200 164 731 |
| > 21 l/min | 200 164 730 |
| > 30 l/min | 200 164 732 |

easyfarm365+
high pressure hose for the agriculture

- » especially developed for the use in the agriculture
- » for the professional cot and machine cleaning
- » considerably longer working life in comparison to common high pressure hoses
- » ideal for the use on rough floors under hardest conditions
- » smooth, translucent surface made out of a thermoplastic elastomer
- » oil-, UV-, ozone-resistant and weatherproof
- » flexible in case of low temperatures: -40 °C – +120 °C, -40 °F – +248 °F
- » excellent ease of use and high safety

3/8" m : 3/8" m



| TYP | DN | pressure | °C | ↔ | R+M Nr. |
|--------------|----|----------|--------|------|----------------|
| easyfarm365+ | 10 | 275 bar | 120 °C | 10 m | 354 201 443 10 |
| | | | | 15 m | 354 201 443 15 |
| | | | | 20 m | 354 201 443 20 |
| | | | | 25 m | 354 201 443 25 |
| | | | | 30 m | 354 201 443 30 |
| | | | | 40 m | 354 201 443 40 |




LTF

R+M Nr.
202 600 545

ST-2600: professional gun with patented LTF technology and coupling KW. Max. 310 bar / 45 l/min / 150 °C

Motor pump combination

Annovi Reverberi
type MTP HXW 30.15

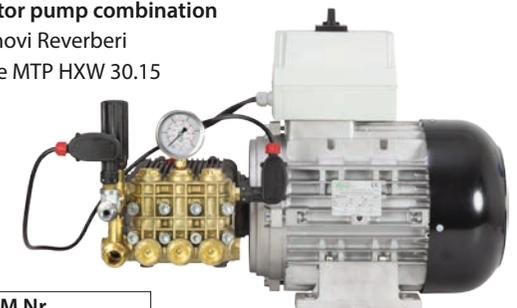

R+M Nr.
170 260 60

easy foam 365+

