

Suttner unloader valve ST-265



Solid «splint»:
Professional and robust
processing of the pres-
sure-intensive parts.



Specially shaped: Inno-
vative, flattened spring
contour.



**Equipped with
ball check valve**

Suttner unloader valve ST-265 with permissible working pressure up to 350 bar

- Soft switching behavior
- Fatigue-free spring
- Particularly easy to maintain
- Low pressure drop
- Valve elements made of high-grade stainless steel and ceramic

ST-265



☰ = Inlet 3/8" F. ☻ = Outlet 3/8" F.
BP = Bypass 3/8" F. Check Valve with ball.
Max. 350 bar / 80 °C


R+M Nr.	
200 265 500	50 l/min



Only on request:
Lid with
private label.



**Particularly
durable!
High-quality
combination
of materials**

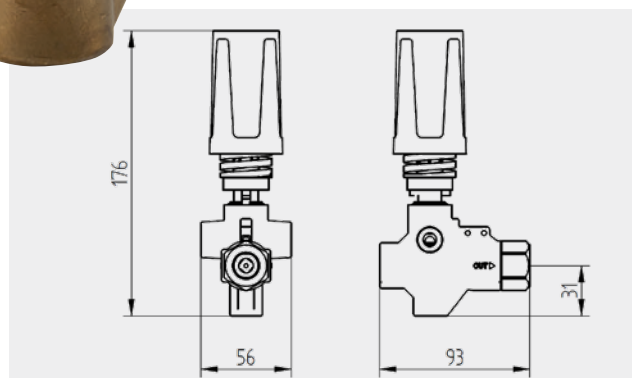

Technical data

max. pressure	350 bar
max. temperature	80 °C
inlet / outlet	3/8" F / 3/8" F
bypass	BP 3/8" F
flow	50 l/min

Version 07.22