


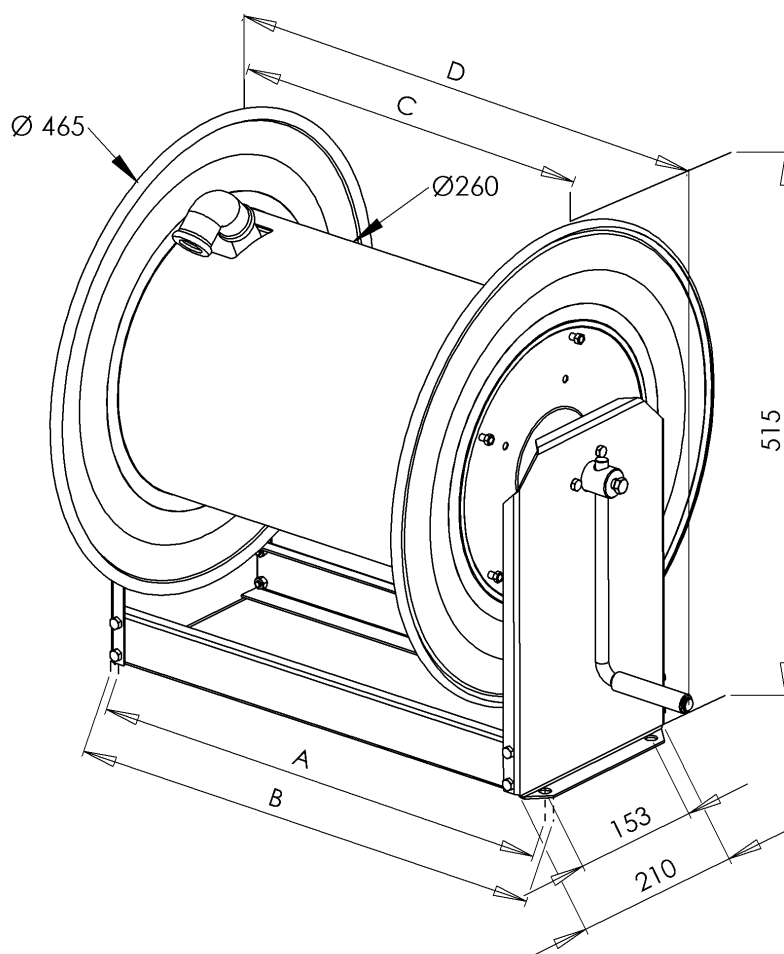

Type	Product-no.	Weight [kg]	Enrollable hose lengths [m]	Hose-Ø [mm]	Max. pressure [bar]	Dimensions [mm]				Material of the swivel
						Nominal- width/ thread	A	B	C	
STKi2 20/12	V10720010	10,5	35	22	200 *	12 = ½"i	287	312	200	Al/V2a
STKi2 20/19	V10720011	11,7	20	28	200	19 = ¾"i	287	312	200	Ms/V2a
STKi2 20/24	V10720016	12,0	15	35	100	24 = 1"i	287	312	200	Ms/V2a
STKi2 40/12	V10720012	13,5	70	22	200 *	12 = ½"i	487	512	400	Al/V2a
STKi2 40/19	V10720013	14,7	40	28	200	19 = ¾"i	487	512	400	Ms/V2a
STKi2 40/24	V10720017	15,0	33	35	100	24 = 1"i	487	512	400	Ms/V2a
STKi2 50/12	V10720018	14,6	85	22	200 *	12 = ½"i	587	612	500	Al/V2a
STKi2 50/19	V10720019	15,8	50	28	200	19 = ¾"i	587	612	500	Ms/V2a
STKi2 50/24	V10720020	16,1	43	35	100	24 = 1"i	587	612	500	Ms/V2a
STKi2 60/12	V10720021	15,7	100	22	200 *	12 = ½"i	687	712	600	Al/V2a
STKi2 60/19	V10720022	16,9	60	28	200	19 = ¾"i	687	712	600	Ms/V2a
STKi2 60/24	V10720023	17,2	52	35	100	24 = 1"i	687	712	600	Ms/V2a
STKi2 70/12	V10720024	16,8	115	22	200 *	12 = ½"i	787	812	700	Al/V2a
STKi2 70/19	V10720025	18,0	70	28	200	19 = ¾"i	787	812	700	Ms/V2a
STKi2 70/24	V10720026	18,3	61	35	100	24 = 1"i	787	812	700	Ms/V2a
STKi2 80/12	V10720027	17,9	130	22	200 *	12 = ½"i	887	912	800	Al/V2a
STKi2 80/19	V10720028	19,1	80	28	200	19 = ¾"i	887	912	800	Ms/V2a
STKi2 80/24	V10720029	19,4	70	35	100	24 = 1"i	887	912	800	Ms/V2a

- In case pressures up to 300 bar are required the 3/8" swivel WDH10 can be used. The standard gaskets and bearing bushes permit working temperatures up to 100°C. Materials which permit working temperatures up to 180°C are available at an extra charge.