

# K-Lock TR22 high-pressure hoses with rotating hand screw connection

## R+M / Suttner professional hose lines

In our range of hoses we now also offer you smooth high-pressure hoses with the special TR22 thread for existing systems.

The hose lines are optionally equipped with the swivelling hand screw connection and also with a swivelling 11 mm crimp nipple.



Swivel connection


Inner values:  
TR22 crimp  
nipple in  
stainless steel

## TR22 crimp nipple with fitting on HP hose assemblies for safe and easy handling






- Ergonomic hard PVC handle in yellow
- Flattened area for your private label
- Dimensions: diameter 39 mm, length 106 mm
- Hose lines with one or two wire inserts in DN 6, 8 and 10
- Choice of black, gray and blue high pressure hoses
- We supply TR22 crimping nipples exclusively in stainless steel

Lasting impression possible:  
Space for your private label

106 mm



**Ergonomic fitting:**  
Easy connection and disconnection between device and hose.



TR22: Thread for existing systems




**Our recommendation:**  
dust protection seal  
o-ring

| R+M Nr.     | PU         |
|-------------|------------|
| 050 000 110 | 1 piece    |
| 791 932 401 | 100 pieces |

# K-Lock TR22 high-pressure hoses with rotating hand screw connection

## High-pressure hoses for existing systems

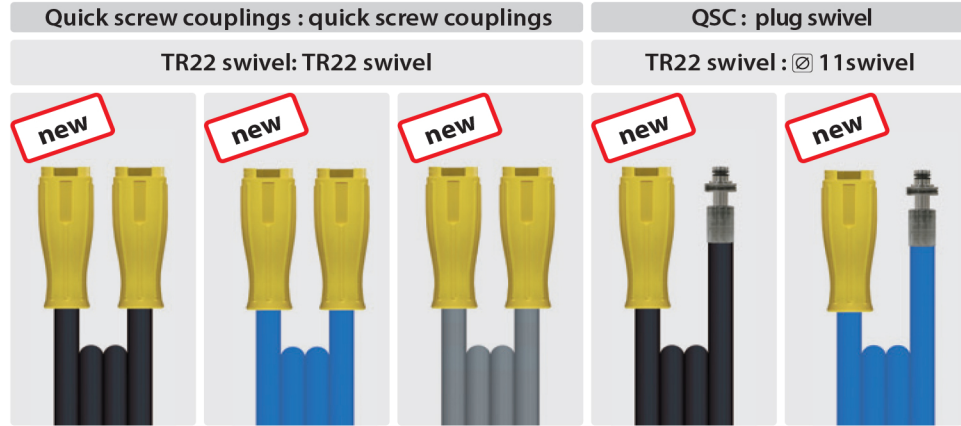

### Hoses with single wire braid and wrapped cover

| TYP | DN | P       | °C     | ↔    | R+M Nr.        | R+M Nr.        | R+M Nr. | R+M Nr.        | R+M Nr.        |
|-----|----|---------|--------|------|----------------|----------------|---------|----------------|----------------|
| 1SN | 6  | 250 bar | 150 °C | 10 m | 330 116 642 10 | 331 116 642 10 |         |                |                |
|     |    |         |        | 15 m | 330 116 642 15 | 331 116 642 15 |         | 330 116 782 15 | 331 116 782 15 |
|     |    |         |        | 20 m | 330 116 642 20 |                |         |                |                |
| 1SN | 8  | 210 bar | 150 °C | 10 m | 340 116 642 10 |                |         |                |                |
|     |    |         |        | 15 m | 340 116 642 15 |                |         |                |                |
|     |    |         |        | 20 m | 340 116 642 20 |                |         |                |                |
| 1SN | 8  | 315 bar | 150 °C | 10 m | 343 116 642 10 |                |         |                |                |
|     |    |         |        | 15 m | 343 116 642 15 |                |         | 343 116 782 15 |                |
|     |    |         |        | 20 m | 343 116 642 20 |                |         | 343 116 782 20 |                |
| 1SN | 10 | 210 bar | 150 °C | 10 m | 350 116 642 10 |                |         |                |                |
|     |    |         |        | 25 m | 350 116 642 25 |                |         |                |                |
|     |    |         |        | 40 m | 350 116 642 40 |                |         |                |                |

### Hoses with double wire braid and *smooth* cover

| TYP | DN | P       | °C     | ↔     | R+M Nr.         | R+M Nr.        | R+M Nr.        | R+M Nr.        | R+M Nr. |
|-----|----|---------|--------|-------|-----------------|----------------|----------------|----------------|---------|
| 2SN | 8  | 400 bar | 150 °C | 1.2 m | 345 616 642 012 |                |                |                |         |
|     |    |         |        | 10 m  | 345 616 642 10  | 346 616 642 10 | 347 616 642 10 |                |         |
|     |    |         |        | 15 m  | 345 616 642 15  | 346 616 642 15 | 347 616 642 15 |                |         |
|     |    |         |        | 20 m  | 345 616 642 20  | 346 616 642 20 | 347 616 642 20 | 345 616 782 20 |         |
|     |    |         |        | 30 m  | 345 616 642 30  |                |                |                |         |
|     |    |         |        | 40 m  |                 |                |                | 345 616 782 40 |         |