
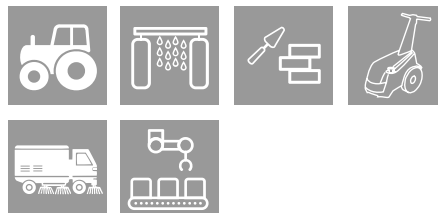


RK 15.28 HN cod. 20640

Technical features

AR Code	20640
Version	N
Max flow rate (l / min)	15
Max flow rate (gpm)	3.96
Max pressure (bar)	275
Max pressure (psi)	4000
Power (Hp)	11
Power (Kw)	8.2
Rpm (rpm)	1450
Weight kg)	9.5

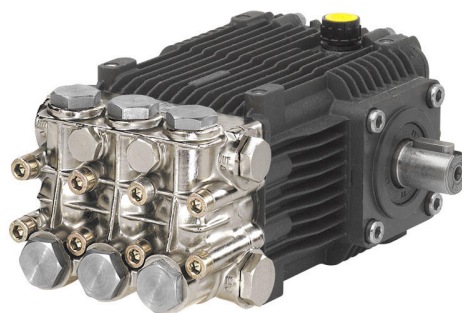

Description

Alternative volumetric pump with 3 pistons for use on washing units and industrial systems. Pump body and covers in die-cast aluminum alloy. Rear cover with oil drain and oil level. Plug with dipstick for oil level on pump body. Movement of the pistons realized through the system of the connecting rod - crank. Pump shaft in molded high-strength steel. Oversized main bearings. Connecting rods in bronze. Full ceramic pistons. Nickel-plated brass pump head with stainless steel valve caps. Double seal sealing system. Valve plugs for both suction and delivery for better maintenance.

Standard accessories



**CR 1 "1: 2,24
code 1689**



**VR 3B for RK
series cod.
22308**



VRZ cod. 24669